

Tenutō Combo

25L350

This product combines individual refrigerator and freezer together, which can apply the needs of multi-temperature storage. Suitable for hospitals, university laboratories, scientific research institutes, electronic industry, chemical industry, and military industry.

25L350
Net capacity 350L (R:206L, F:144L)
Refrigerator 2 to 8 °C
Freezer -10 °C to -25 °C



Safer Storage

Superior Temperature Uniformity and Precise Control

- » Microcomputer temperature control system
- » Refrigerator and freezer temperature display independently
- » Two compressors, refrigerator and freezer operate independently
- » Temperature accuracy 0.1°C
- » Temperature uniformity $\pm 1.5^{\circ}\text{C}$
- » USB port, temperature record traceable
- » Backup battery

Advanced Technologies

Reliable and Stable Performance

- » International famous compressor
- » Top cooling system
- » DC turbo fan
- » Built-in air duct
- » LBA forming technology
- » Micro-channel condenser
- » Patented D+ heat exchange technology, high efficiency and energy saving

Humanized Design

Friendly for Daily Use

- » PVC coated steel shelves for refrigerator
- » Fixed caster plus universal wheel
- » Safety lock
- » Easy open handl.
- » Multi layers gaskets for freezer
- » Better temperature insulation
- » Wide voltage range design
- » Access port
- » Dry contacts

Top Cooling System

Strong cooling airflow from the top to the bottom, works as an air curtain to block the external hot air from entering the refrigerator when door is opening, so as to prevent the temperature in the cabinet from rising rapidly, also contributes better temperature uniformity performance.

- » Improves temperature uniformity performance by 40%.
- » Max interior temperature difference $\pm 1^{\circ}\text{C}$
- » Prevent temperature rising rapidly when door is opening
- » Energy consumption 47% lower than similar sized normal pharmacy refrigerator.

DC Turbo Fan


- » Decrease noise level by 8%
- » Integrated DC Turbo Fan works with smaller vibration and higher efficiency
- » Safer for daily use
- » No strong electric component in chamber, safer and more reliable.

Built-In Air Duct

- » Increase the effective interior space by 10%
- » Less interior space occupancy
- » Built-in air duct plus the top cooling design, ensure temperature in the top of chamber is cool enough for storage


Dual Display

- » Display refrigerator and freezers temperature independently.
- » Refrigerator and freezer operate individually.
- » Each compressor operates independently.


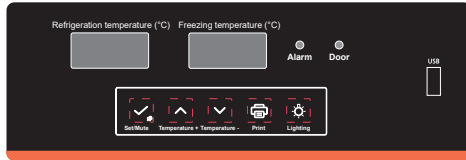


Micro-Channel Condenser

Compressor overheating protection, effectively improving the service life of the core part. Powerful heat dissipation for condenser, heat exchange capacity increase by more than 20% than common copper tube fin condenser of other suppliers.

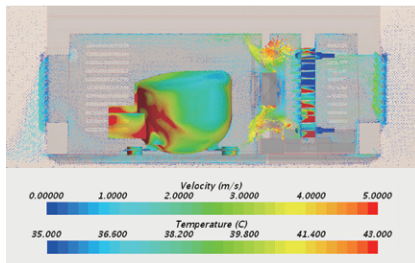

Typical Performance Characteristics at 25°C Ambient

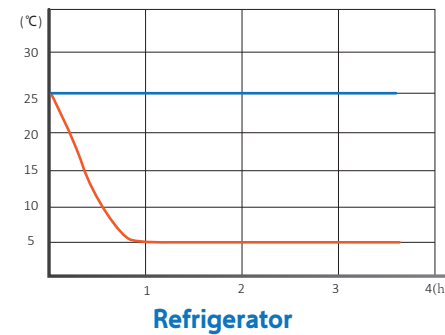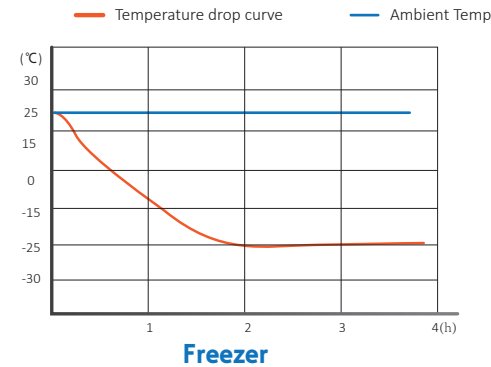

LBA Forming Technology

- » The world's leading fourth generation foaming agent.
- » More uniform density, better insulation, more energy-saving.
- » More reasonable foaming layer design, larger interior storage space.

Tenutō Combo 25L350 Specifications

Item	Model No.	25L350	
Specifications	Compartment	Refrigerator	Freezer
	Cabinet Type	Upright	
	Door Type	Solid Door	
	Climate Class	N	
	Cooling Type	Forced air	Direct
	Defrost Mode	Auto	Manual
	Compressor Type	GMCC/1	
	Sensor Quantity	3	1
	Refrigerant	R600a/28g	R600a/45g
	Storage Volume (L)	206	144
	Exterior Material	High quality coated steel	
	Interior Material	High quality coated steel	
	Insulation	LBA Foaming	
	Insulation (mm)	45	90
Dimensions	Compartment	Refrigerator	Freezer
	Interior Size(mm)	600*505*690	540*480*560
	Exterior Size WxDxH (mm)	695*655*1920	
	Packing Size with Tray (mm)	755*715*2025	
	Net Weight	93	
	Gross Weight	105	
	Packing Method	Carton	
	Container Load (20' /40'H)	24/48	

Item	Model No.	25L350	
Electrical Data	Compartment	Refrigerator	Freezer
	Controller	Microprocessor	
	Display	LED display	
	Temperature Range	2°C to 8°C	-10°C to -25°C
	Temperature Accuracy	0.1	
	Temperature Uniformity/°C	≤3°C	
	Power Supply (V/Hz)	220-240V~/50HZ	220-240V~/60HZ
	Noise dB(A)	45	
AlarmFunctions (Visible & Audible)	Compartment	Refrigerator	Freezer
	High Temperature Alarm	Y	
	Low Temperature Alarm	Y	
	Power Failure Alarm	Y	
	Sensor Failure Alarm	Y	
	Ambient Temperature Alarm	Y	
	Door Ajar alarm	Y	
	Remote Alarm	Y	
	Low Battery Alarm	Y	
Accessories	Compartment	Refrigerator	Freezer
	USB Interface	Y	
	RS485	Y	
	Shelves/Drawers	3	3
	Self Lock	Y	
	Cable Port	Y/1	Y/1
	Castor	Y	
	Backup Battery	Y	

Tenutō is a trademark registered in the US Patent and Trademark Office. Product information is provided by the manufacturer and is subject to change due to updates, regional variations, or differences in manufacturing processes. Swisslog Healthcare is not responsible for any discrepancies or variations in product details. ©2025 Swisslog Healthcare NAM EN 102025 TRF-213



**For more information, visit:
swisslog-healthcare.com/tenuto**

